


### Maxi Line Dressing Room

- Flexible size configurations
- Use outside walls to display merchandise on standard Maxi Line shelving
- Comprised of standard Maxi Line components
- Easily removed or relocated
- Can be reconfigured using standard back sizes
- Door is customer supplied



Parts Required for Single Dressing Room (shown)			
Part Number	Description		Qty.
A	BU-96	Basic Upright	10
B	EU-24	Extension Upright	10
C	SL-4	Lower Spanner 4'	4
D	SL-5	Lower Spanner 5'	1
E	SS-4	Splicer Spanner 4'	12
F	SS-5	Splicer Spanner 5'	3
G	STL-4	Top Spanner 4'	6
H	STL-5	Top Spanner 5'	6
I	OBS-4	Open Back Stiffener 4'	4
J	OBS-5	Open Back Stiffener 5'	1
K	OBSKP-48	Open Back Kickplate 4'	4
L	OBSKP-60	Open Back Kickplate 5'	1
M	BH-436	Hardboard Back 48" x 36"	4
N	BH-536	Hardboard Back 60" x 36"	1
O	BXH-430	Hardboard Back Extension 48" x 36"	8
P	BXH-530	Hardboard Back Extension 60" x 36"	2
Q	BXHL-424	Hardboard Back Extension Laminate 48" x 36"	8
R	BXHL-524	Hardboard Back Extension Laminate 60" x 36"	2
S	MEBP-4836	Metal Extension Pegboard 48" x 36"	4
T	MEBP-6036	Metal Extension Pegboard 60" x 36"	1
U	MEBP-4830	Metal Extension Pegboard 48" x 30"	8
V	MEBP-6030	Metal Extension Pegboard 60" x 30"	2
W	TLEG-16	T-Leg	6
X	DRTRS	Dressing Room Top Rail Stabilizer	2
Y	DRUFC	Dressing Room Upright Face Cover 120"	2
Z	DRICF	Dressing Room Inside Corner Filler 120"	4
AA	DROCF	Dressing Room Outside Corner Filler 120"	4
BB	DRUS	Dressing Room Upright Spacer	4
CC	DRIA	Dressing Room Inside Anchor	2
DD	DROA	Dressing Room Outside Anchor	2
EE	SFA-RD-1	Seismic Floor Anchors	6
FF	SFA-EB-1	Seismic Floor Anchors Expansion Bolts	12
GG	DRDP-60	Dressing Room Door Panel	1
HH	DPS	Dressing Panel Splicer	1
II	DRDPR-LH	Dressing Room Door Panel Retainer-Left Hand	1
JJ	DRDPR-RH	Dressing Room Door Panel Retainer-Right Hand	1
KK	DRDPS	Dressing Room Divider Panel Stabilizer	2
LL	DR88HP	Dressing Room Hardware Pack	1

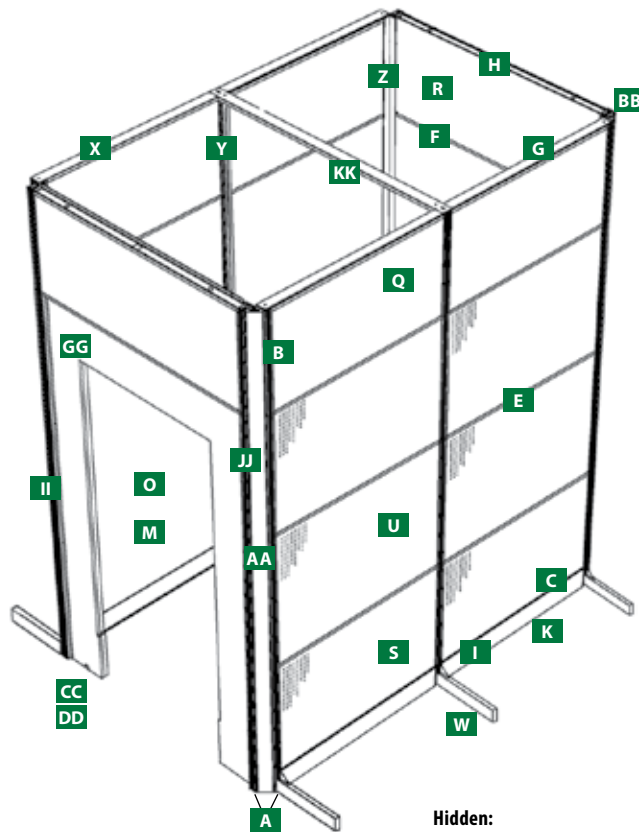

**Hidden:**

- |                    |                    |
|--------------------|--------------------|
| <b>D</b> SL-5      | <b>V</b> MEBP-6030 |
| <b>J</b> OBS-5     | <b>EE</b> SFA-RD-1 |
| <b>L</b> OBSKP-60  | <b>FF</b> SFA-EB-1 |
| <b>N</b> BH-536    | <b>HH</b> DPS      |
| <b>P</b> BXH-530   | <b>LL</b> DR88HP   |
| <b>T</b> MEBP-6036 |                    |

**A Basic Upright**

- Slotted 1" (25 mm) OC for flexibility plus maximum space
- Comprised of heavy-gauge, high-tensile steel components welded into a single unit with a 15,000 inch-pound rating
- All Basic Uprights have an integral leveler
- Kickplates of either closed or open type (or reinforced base shoes) must be installed on shelving runs

**BU-(AH)**

- BU .... Basic Upright  
 AH .... Actual Height 36" to 96" in 6" increments  
 (914 mm to 2438 mm in 152 mm increments)

**B Extension Upright**

- Connector inserts into top of shelving section Upright
- Set screws expand the connector, solidly aligning assembly

**EU-(NH)**

- EU .... Extension Upright  
 NH .... Nominal Height 6" to 54" in 6" increments  
 (152 mm to 1371 mm in 152 mm increments)

**NOTE!**

Maximum load capacity is 200 lbs  
 when loaded one side only.

**C D Lower Spanner**

- "Snap-in" spanner secures uprights at equal spacing and supports back panels
- Electrical knockouts

**SL-(NW)**

- SL .... Lower Spanner  
 NW .... Nominal Width 4' or 5'  
 (1219 mm or 1524 mm)

**E F Splicer Spanner**

- Splicer spanner joins two back panels in sections 78" (1981 mm) and above
- Electrical knockouts

**SS-(NW)**

- SS .... Splicer Spanner  
 NW .... Nominal Width 4' or 5'  
 (1219 mm or 1524 mm)

**G H Top Spanner**

- "Snap-in" spanner secures uprights at equal spacing, traps back panels and trims top of section
- Electrical knockouts

**STL-(NW)**


- STL .... Top Spanner  
 NW .... Nominal Width 4' or 5'  
 (1219 mm or 1524 mm)

**I J Open Back Stiffener**


- Electrical knockouts
- Bolts in place adding stability

**OBS-(NW)**

- OBS .... Open Back Stiffener  
 NW .... Nominal Width 4' or 5'  
 (1219 mm or 1524 mm)

**K L Open Back Stiffener Kickplate****OBSKP-(NW)**

- OBSKP .... Open Back Stiffener Kickplate  
 NW .... Nominal Width 24", 30", 36", 48", 60"  
 (610 mm, 762 mm, 914 mm, 1219 mm, 1524 mm)

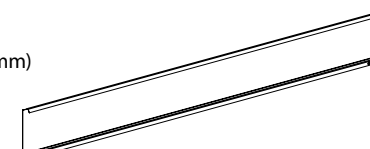

### M N Back Panel

- Hardboard or pegboard available

#### B(TYPE)-(NW)(NH)

B .... Back  
 TYPE .... P=Pegboard  
           H=Hardboard  
 NW .... Nominal Width 4' or 5'  
           (1219 mm or 1524 mm)  
 NH .... Nominal Height 36" to 72" in 6" increments  
           (914 mm to 1829 mm in 152 mm increments)




### O P Q R Back, Extension

- Hardboard or pegboard available

#### BX(TYPE)-(NW)(NH)

BX .... Back Extension  
 TYPE .... P=Pegboard  
           H=Hardboard  
 NW .... Nominal Width 4' or 5'  
           (1219 mm or 1524 mm)  
 NH .... Nominal Height 36" to 72" in 6" increments  
           (914 mm to 1829 mm in 152 mm increments)



### Metal Back Panels

- Heavy-gauge metal panel
- Coined perforations 1" OC (25 mm)
- Durable

**NOTE!**  
 Requires the use of  
 Slatwall Spanners, SC-(NW).

#### Non-Perforated


##### MBP-(NW)(NH)-NP

MBP .... Metal Back Panel  
 NW .... Nominal Width 3' or 4'  
           (914 mm or 1219 mm)  
 NH .... Nominal Height 36" to 72"  
           in 6" increments  
           (914 mm to 1829 mm  
           in 152 mm increments)  
 NP .... Non-perforated

#### Perforated

##### MBP-(NW)(NH)

MBP .... Metal Back Panel  
 NW .... Nominal Width 36" or 48"  
           (914 mm or 1219 mm)  
 NH .... Nominal Height 36" to 72"  
           in 6" increments  
           (914 mm to 1829 mm  
           in 152 mm increments)



### S T U V Metal Extension Back Panels

- Use above the lower panels in Maxi Line sections 78" (1981 mm) tall or taller

#### MEBP-(NW)(NH)-(OPT)


MEBP .... Metal Extension Back Panel  
 NW .... Nominal Width 36" or 48"  
           (914 mm or 1219 mm)  
 NH .... Nominal Height 36", 42", 48", 54"  
           (914 mm, 1067 mm, 1219 mm, 1372 mm)  
 OPT .... NP=Non-perforated, Blank=Perforated

### W T-Leg

- Slim design
- Allows shelves to be mounted on outside of fitting room
- Caster is not an option for Dressing Room
- Load capacity of 10,000 lbs

#### TLEG-(NW)

TLEG .... T-Leg  
 NW .... Nominal Width 12" to 22" in 2" increments  
           (305 mm to 559 mm in 51 mm increments)




### X Dressing Room Top Rail Stabilizer

- Connects tops of outside wall sections

#### DRTRS

DRTRS .... Dressing Room Top Rail Stabilizer




### Dressing Room Corner Crossbar

- Connects interior wall between dressing rooms
- Required for double dressing rooms

#### DRCCB

DRCCB .... Dressing Room Corner Crossbar




## Y Dressing Room Upright Face Cover

- Covers slots to prevent line of sight when upright is exposed on wall section

### DRUFC-(NH)

DRUFC .... Dressing Room Upright Face Cover  
 NH .... Nominal Height 96", 102", 108", 112"  
 (2438 mm, 2591 mm, 2743 mm, 2845 mm)  
 Blank=Standard 120" (3048 mm)




## Z Dressing Room Inside Corner Filler

- Covers slots to prevent line of sight in each corner
- One for each inside corner

### DRICF-(NH)

DRICF .... Dressing Room Inside Corner Filler  
 NH .... Nominal Height 96", 102", 108", 112"  
 (2438 mm, 2591 mm, 2743 mm, 2845 mm)  
 Blank=Standard 120" (3048 mm)



Inside Corner Detail



## AA Dressing Room Outside Corner Filler

- Gives clean look to outside corners

### DROCF-(NH)

DROCF .... Dressing Room Outside Corner Filler  
 NH .... Nominal Height 96", 102", 108", 112"  
 (2438 mm, 2591 mm, 2743 mm, 2845 mm)  
 Blank=Standard 120" (3048 mm)




## BB Dressing Room Upright Spacer


- Four required for each outside corner
- Secures two corner uprights

### DRUS

DRUS .... Dressing Room Upright Spacer



Outside Corner Detail




## CC Dressing Room Inside Anchor

- Bolts to floor when required

### DRIA

DRIA .... Dressing Room Inside Anchor




## DD Dressing Room Outside Anchor

- Bolts to floor when required

### DROA

DROA .... Dressing Room Outside Anchor




## EE Seismic Floor Anchors, Regular-Duty

- For use when local building codes require anchoring Base Shoes and/or standard Uprights to floor
- Level as required prior to anchoring floor
- Requires two expansion bolts for each order
- Galvanized only

### SFA-RD-1

SFA .... Seismic Floor Anchors  
 RD .... Regular-Duty  
 1 .... 1 Pack



## FF Seismic Floor Anchors Expansion Bolts

- ICBO approved
- 3/8"-16 x 3 1/2"
- Order two bolts per Seismic Floor Anchor, Regular or Heavy-Duty

### SFA-EB-1

SFA .... Seismic Floor Anchors  
 EB .... Expansion Bolt  
 1 .... 1 Pack




## GG Dressing Room Door Panel

- Door is customer supplied

### DRDP(NW)

DRDP .... Dressing Room Door Panel  
 NW .... Nominal Width 48" or 60"  
 (1219 mm or 1524 mm)

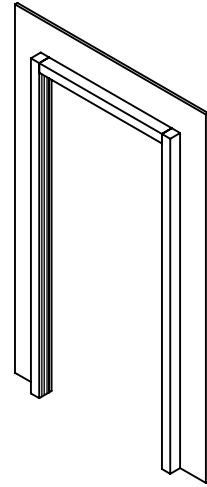


## HH Dressing Room Door Panel Splicer

- Mounts above dressing room door

### DPS-(NW)

DPS .... Door Panel Splicer  
 NW .... Nominal Width 48" (1219 mm)  
 Blank=Standard 60" (1524 mm)



## II JJ Dressing Room Door Panel Retainer

- Use when installing double fitting rooms
- Install left- and right-hand retainers into interior of walls

### DRDPR-(HAND)

DRDPR .... Dressing Room Panel Retainer  
 HAND .... LH=Left-Hand  
 RH=Right-Hand




## KK Dressing Room Divider Panel Stabilizer

- Connects interior walls

### DRDPS

DRDPS .... Dressing Room Divider Panel Stabilizer



## LL Dressing Room Hardware Pack

- Miscellaneous parts required for installation

### DR88HP

DR88HP .... Dressing Room Hardware Pack

**For more dressing room accessories visit [madixinc.com](http://madixinc.com)**


### Shoe Bench with End Mirrors

- Designed for retail settings that need benches to accommodate customers' shopping needs
- Provides seating and mirrors for customers trying on shoes or clothing
- Can be used in conjunction with T-Rack Shoe Department run or any setting that requires a seating application
- Load capacity 500 lbs



#### SBEM-301718

- SBEM ..... Shoe Bench with End Mirrors
- 30 ..... Nominal Width 30" (762 mm)
- 17 ..... Nominal Depth 17" (432 mm)
- 18 ..... Nominal Height 18" (457 mm)

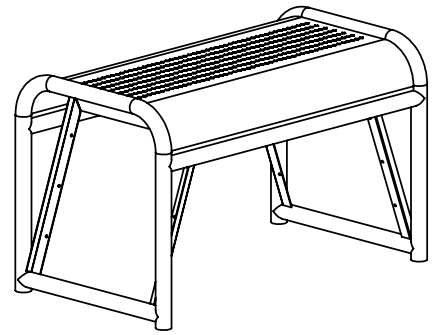

### Corner Perforated Bench

- Provide seating in a dressing room without sacrificing floor space
- Can be bolted to floor
- Load capacity 500 lbs



#### FRV2SRCB-(NH)

- FRV2SRCB ..... Corner Perforated Bench
- NH ..... Nominal Height
- Blank=18" (457 mm)
- 19=19" (483 mm)

