



MADIXTM
STRONG AS STEEL

@Front Shelves



WWW.MADIXINC.COM
TEXAS • ALABAMA

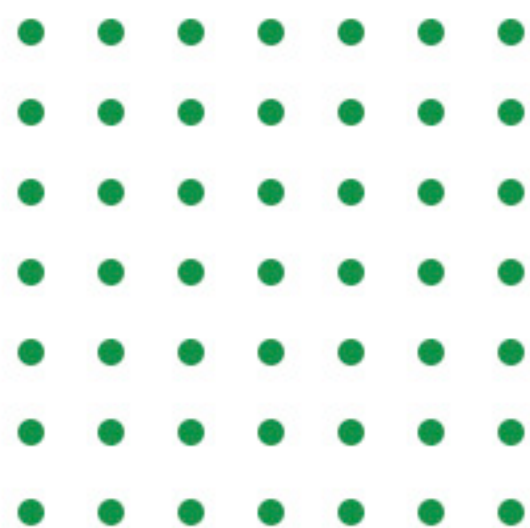


Table of Contents

@Front for Refrigerated Applications	3
@Front for Maxi Line, Tube Line and Other Applications ..	7
@Front Pull-Out Roller Shelf	9
@Front for Heavy-Duty Applications	11
@Front Gen5 System	14



www.madixinc.com

Texas 500 Airport Road, Terrell, TX 75160 | 1010 S. Bolton, Jacksonville, TX 75766
Alabama 20984 Alabama Hwy. 9, Goodwater, AL 35072 | 500 Madix Drive, Eclectic, AL 36024



Create a perfectly stocked shelf instantly with @Front!

@Front incorporates multiple small, rolling tracks that work with gravity to automatically feed cooler merchandise to front of shelf, cutting time and labor necessary for store merchandising and facing. Dividers can be easily adjusted in mere seconds, accommodating bottled, canned, and boxed goods of varying size and shape. Rolling-track system is fully integrated with the shelf itself, little to no maintenance required. Simply remove the entire shelf for a thorough wash, or wipe the rollers with a damp cloth to remove light dust and debris. Unique, patented design uses all plastic construction, allowing roller replacement from top surface (spare rollers integrated into bottom of every shelf). 5° downtilt improves sight lines for better visual impact than other gravity feed systems. Replaces cumbersome, spring pusher systems.



- @Front Roller Shelf System for Hussmann and Hill Phoenix Coolers
- @Front is the only NSF listed roller system due to patented design
- @Front feature: Landing zone to reduce/eliminate roller damage from dropped merchandise
- @Front snap-in design for replacement rollers; each roller mat includes a package of replacement rollers, attached to the underside of mat
- @Front design has drain for fluid; fluid collects and rollers become inoperative
- Easy to clean: remove mat and pressure wash due to all plastic construction
- Kits are packed two per carton: two shelf frames, two roller mats and two shelves of accessories



Intertek

Standard(s):	Food Equipment, NSF/ANSI 2 - 2014, issued February 4, 2014
Product:	Gravity Feed Rolling Shelf
Brand Name:	Sungal, Casca Roll, Cascade Roll, Sunflow, Flowglide, Sunslide
Models:	SRS, SRSM, SRMC, SRSB, SRSD




@Front Shelf Kit

All 36" kits consist of:

- 1 - @Front Shelf Frame
- 1 - @Front Shelf Roller Mat
- 1 - 3"H @Front Shelf Plastic Front Retainer
2 $\frac{7}{8}$ "H when installed
- 14 - 2"H @Front Shelf Metal Dividers
[36"W (914mm)]

All 48" kits consist of:


- 1 - @Front Shelf Frame
- 1 - @Front Shelf Roller Mat
- 1 - 3"H @Front Shelf Plastic Front Retainer
2 $\frac{7}{8}$ "H when installed
- 18 - 2"H @Front Shelf Metal Dividers
[48"W (1219 mm)]

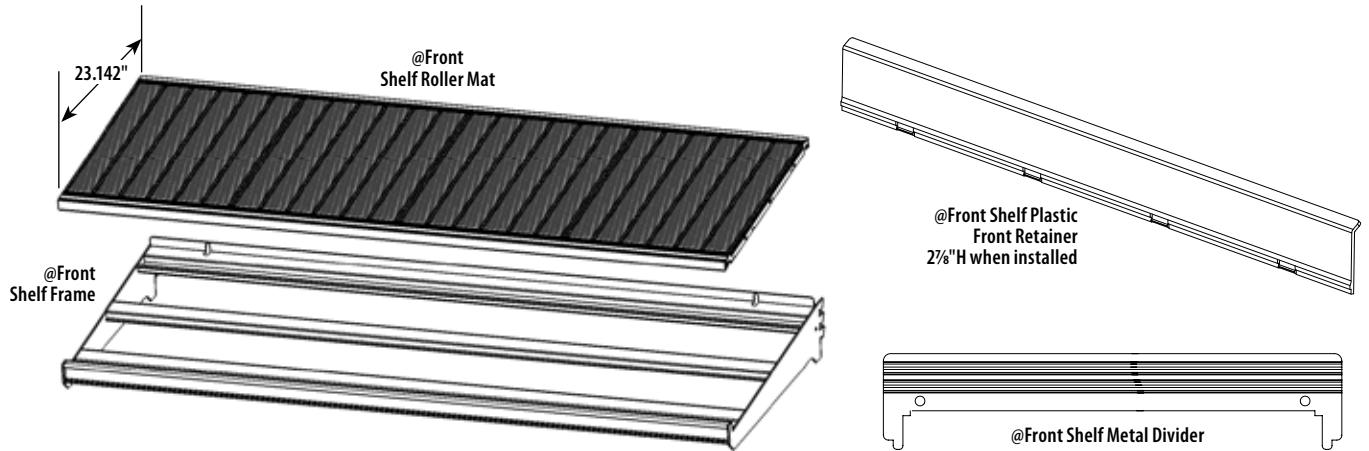

NOTE!

All shelf kits are packed two per carton only; must order in multiples of two.

@Front Shelf Kit Dimensions

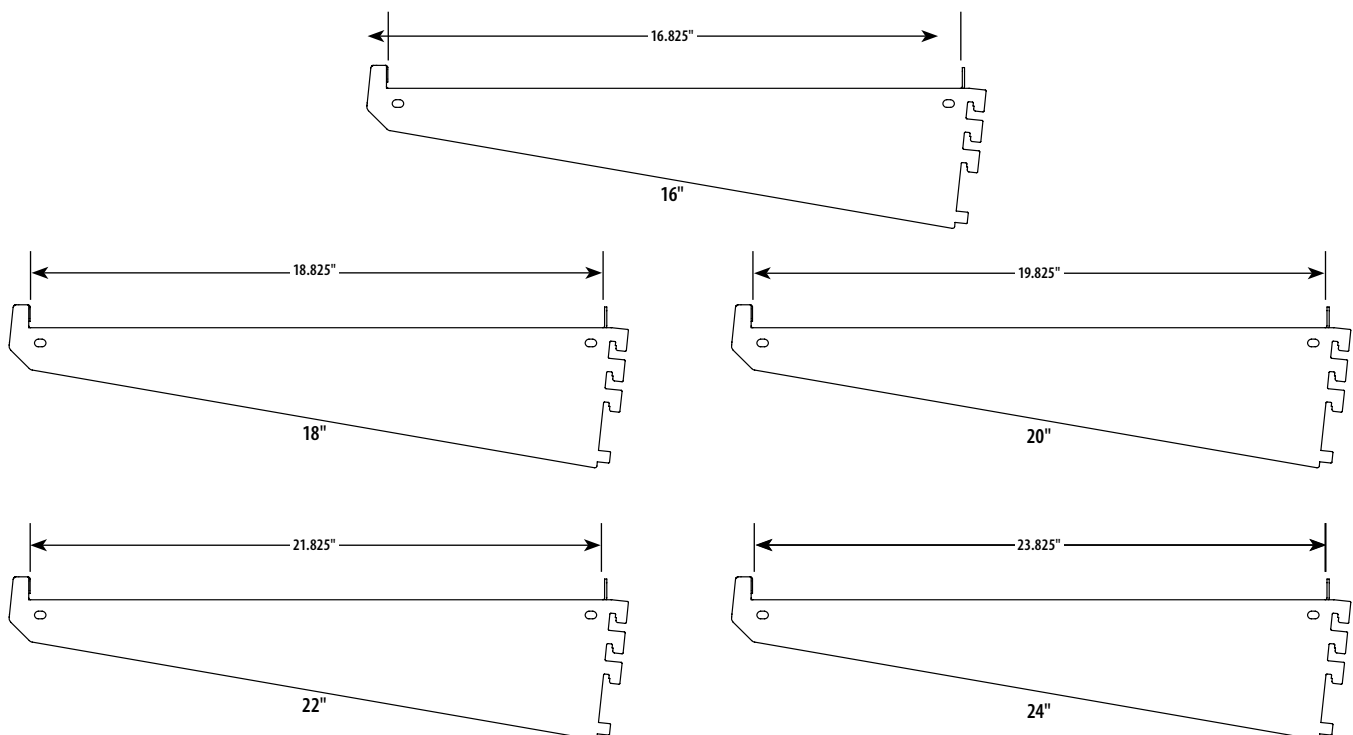

**@Front Shelf Kit for
Hussmann Coolers****AFRSHUCK(NW)(ND)-BLK**

AFRS @Front Roller Shelf

HUCK Hussmann Cooler

NW Nominal Width 36" or 48"
(914 mm or 1219 mm)ND Nominal Depth 16", 18", 20", 22" or 24"
(406 mm, 457 mm, 508 mm, 559 mm
or 610 mm)

BLK Black

@Front Shelf Kits for Hussmann

Hussmann Part #	Description
AFRSHUCK3616-BLK	@Front Roller Shelf Kit 36x16 Color: Black
AFRSHUCK3618-BLK	@Front Roller Shelf Kit 36x18 Color: Black
AFRSHUCK3620-BLK	@Front Roller Shelf Kit 36x20 Color: Black
AFRSHUCK3622-BLK	@Front Roller Shelf Kit 36x22 Color: Black
AFRSHUCK3624-BLK	@Front Roller Shelf Kit 36x24 Color: Black
AFRSHUCK4816-BLK	@Front Roller Shelf Kit 48x16 Color: Black
AFRSHUCK4818-BLK	@Front Roller Shelf Kit 48x18 Color: Black
AFRSHUCK4820-BLK	@Front Roller Shelf Kit 48x20 Color: Black
AFRSHUCK4822-BLK	@Front Roller Shelf Kit 48x22 Color: Black
AFRSHUCK4824-BLK	@Front Roller Shelf Kit 48x24 Color: Black

**@Front Shelf Kit for
Hill Phoenix Coolers****AFRSHPCCK(NW)(ND)-BLK**

AFRS @Front Roller Shelf

HPCK Hill Phoenix Cooler

NW Nominal Width 36" or 48"
(914 mm or 1219 mm)ND Nominal Depth 16", 18", 20", 22" or 24"
(406 mm, 457 mm, 508 mm, 559 mm
or 610 mm)

BLK Black

@Front Shelf Kits for Hill Phoenix


Hill Phoenix Part #	Description
AFRSHPCCK3616-BLK	@Front Roller Shelf Kit 36x16 Color: Black
AFRSHPCCK3618-BLK	@Front Roller Shelf Kit 36x18 Color: Black
AFRSHPCCK3620-BLK	@Front Roller Shelf Kit 36x20 Color: Black
AFRSHPCCK3622-BLK	@Front Roller Shelf Kit 36x22 Color: Black
AFRSHPCCK3624-BLK	@Front Roller Shelf Kit 36x24 Color: Black
AFRSHPCCK4816-BLK	@Front Roller Shelf Kit 48x16 Color: Black
AFRSHPCCK4818-BLK	@Front Roller Shelf Kit 48x18 Color: Black
AFRSHPCCK4820-BLK	@Front Roller Shelf Kit 48x20 Color: Black
AFRSHPCCK4822-BLK	@Front Roller Shelf Kit 48x22 Color: Black
AFRSHPCCK4824-BLK	@Front Roller Shelf Kit 48x24 Color: Black



@Front Well Kit

- All 36" kits consist of:**
- 1 - @Front Deck
 - 1 - @Front Shelf Roller Mat
 - 1 - 1"H (25 mm) @Front Rear Stop
 - 5/8"H (16 mm) when installed
 - 14 - 2"H (51 mm) @Front Shelf Metal Dividers [36"W (914mm)]

- All 48" kits consist of:**
- 1 - @Front Deck
 - 1 - @Front Shelf Roller Mat
 - 1 - 1"H (25 mm) @Front Rear Stop
 - 5/8"H (16 mm) when installed
 - 18 - 2"H (51 mm) @Front Shelf Metal Dividers [48"W (1219 mm)]

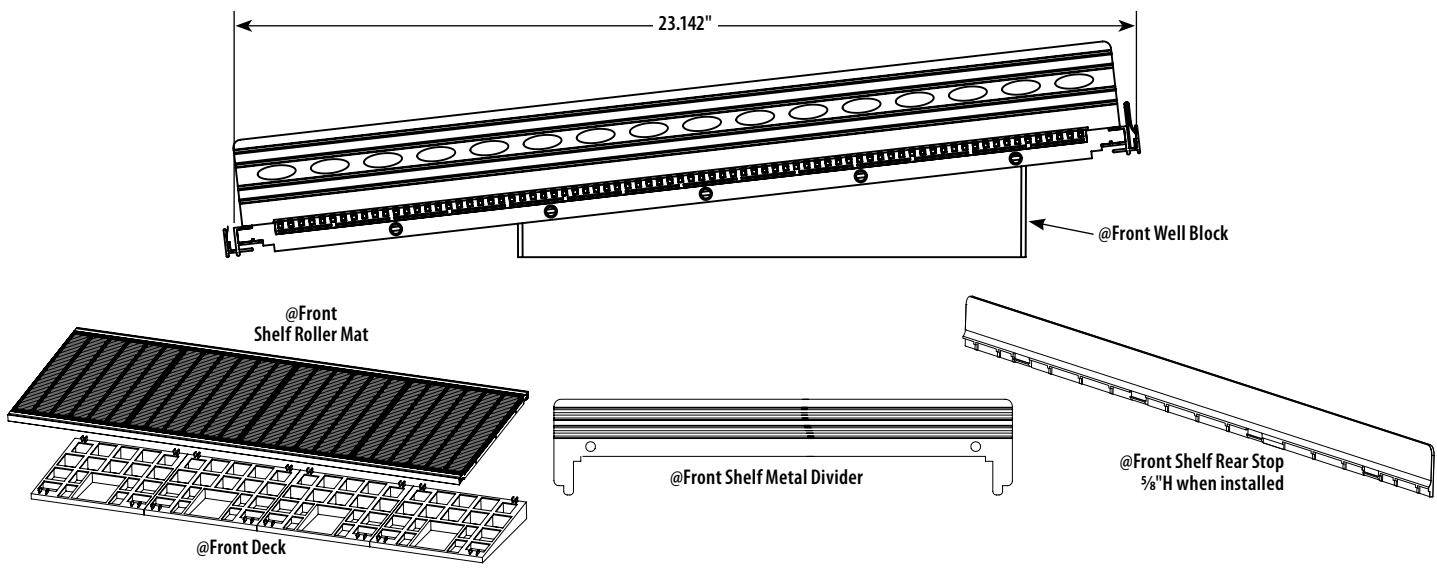

NOTE!
Order fronts separately.

NOTE!
All shelf kits are packed two per carton only; must order in multiples of two.

@Front Shelf, Well Kit

AFRSDHUCK(NW)24-BLK
AFRSD @Front Roller Shelf, Well Kit
HUCK Cooler
NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)
24 Nominal Depth 24"
 (610 mm)
BLK Black

@Front Well Kit	
Part #	Description
AFRSDHUCK3624-BLK	@Front Roller Well Base Kit; 36"x24" Size: 36"W x 24"D Color: Black
AFRSDHUCK4824-BLK	@Front Roller Well Base Kit; 48"x24" Size: 48"W x 24"D Color: Black



@FRONT

ROLLER SHELF SYSTEM

Create a perfectly stocked shelf instantly with @Front!

@Front incorporates multiple small, rolling tracks that work with gravity to automatically feed merchandise to front of shelf, cutting time and labor necessary for store merchandising and facing. Metal dividers can be easily adjusted in mere seconds, accommodating bottled, canned, and boxed goods of varying size and shape. Rolling-track system is fully integrated with the shelf itself, little to no maintenance required. Simply remove the entire shelf for a thorough wash, or wipe the rollers with a damp cloth to remove light dust and debris. Unique, patented design uses all plastic construction, allowing roller replacement from top surface (spare rollers integrated into bottom of every shelf). 5° downtilt improves sight lines for better visual impact than other gravity feed systems. Replaces cumbersome, spring pusher systems.



@Front Shelf


- Provides more merchandising space and better visibility while saving labor and keeping shelves looking fully stocked
- More durable than other self-fronting systems like pushers and slip mats
- Patented system with 3 year warranty
- Clear Fronts available in 2", 3" or 4" heights (51 mm, 76 mm or 102 mm)
- Dividers available in 1" or 2" (51 mm or 76 mm) heights
- 36" ONLY available in 18", 22" or 24" (356 mm, 457 mm, 559 mm or 610 mm)
- Dividers adjust in 1/8" (.318 mm) increments for maximum space efficiency
- Order roller mat and shelf frame separately
- Roller mat is available in beige or black finish, and 14", 18", 22" or 24" depths (356 mm, 457 mm, 559 mm or 610 mm)
- Roller shelf frame has weld-on tag mold standard; DGA2A, DGA2P (painted) aluminum price tag molding optional
- Load capacity is 200 lbs

AFRSM(NW)(ND)-(OPT)

AFR @Front
 SM Shelf Mat
 NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)
 ND Nominal Depth 14", 18", 22" or 24"
 (356 mm, 457 mm, 559 mm or 610 mm)
 OPT BGE=Beige
 BLK=Black

AFRSF(NW)(ND)


AFR @Front
 SF Shelf Frame
 NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)
 ND Nominal Depth 14", 18", 22" or 24"
 (356 mm, 457 mm, 559 mm or 610 mm)

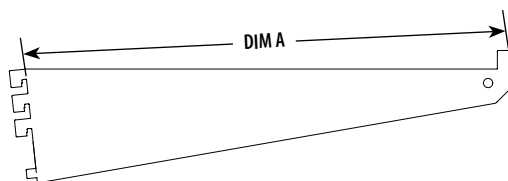

NOTE!

36" NW ONLY available in 18", 22" or 24" ND.

24" ND only available in Black.

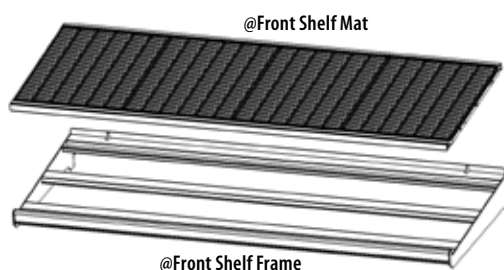


Nominal Depth	Dim A=Actual Depth from Upright Face
14	14.738
16	16.745
18	19.517
20	21.517
22	22.500
24	24.938
26	27.524
28	29.913
30	30.938

@Front Deck

- More merchandising space: shelf functions at a 5° downtilt; slip-mat systems, which require a minimum 10-15° downtilt for similar effect
- Extremely durable, patented rolling-track system with a 3-year warranty
- Choice of 1" or 2" (25 mm or 51 mm) metal dividers and 2" or 3.5" (51 mm or 89 mm) heavy-duty, plastic fronts
- Divider adjusts in 1/8" (3 mm) increments
- Pack of two per box only
- Rests on Standard Base Shelf [SBS-(NW)(ND)], ordered separately
- Load capacity is 200 lbs
- Standard finish: Beige
- For alternate finishes, contact your Sales Representative

AFRD48(ND)-2PK

AFRD @Front Deck
 48 Nominal Width 48"
 (1219 mm)
 ND Nominal Depth 18", 22" or 24"
 (457 mm, 559 mm or 610 mm)
 2PK Pack of 2

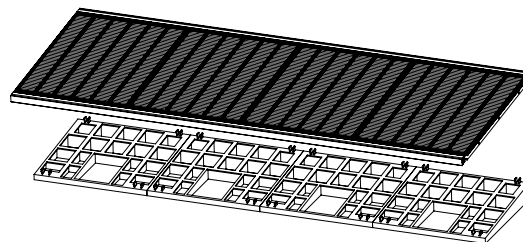


NOTE!
 Only available in Beige.

@Front Shelf Plastic Front

- Clear, plastic front
- 2" (51 mm) installed height of 1 1/2" (38 mm)
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF2(NW)

AFR @Front
 SPF Shelf Plastic Front
 2 Nominal Height 2"
 (51 mm)
 NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)

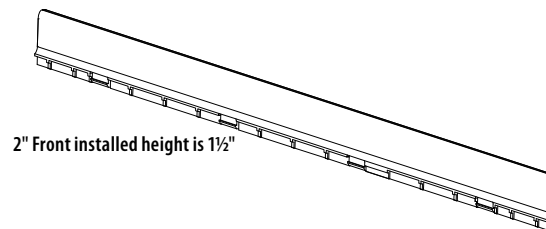


2" Front installed height is 1 1/2"

@Front Shelf Plastic Front, Heavy-Duty

- 3" or 4" (76 mm or 102 mm) heavy-duty, plastic fronts
- 3" (76 mm) installed height of 2 7/8" (73 mm)
- 4" (102 mm) installed height of 3 3/8" (98 mm)
- Slight bend at the top of the Plastic Front is to face the rear of the shelf
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF(NH)(NW)H

AFR @Front
 SPF Shelf Plastic Front
 NH Nominal Height 3" or 4"
 (76 mm or 102 mm)
 NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)
 H Heavy-Duty

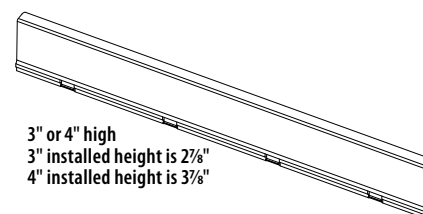


3" or 4" high
 3" installed height is 2 7/8"
 4" installed height is 3 3/8"

@Front Shelf Metal Divider

- Choice of 1" or 2" (25 mm or 51 mm) metal dividers
- 1" (25 mm) pack of 50
- 2" (51 mm) pack of 25
- Can be used with Maxi Line @Front Roller Shelves as well as refrigeration @Front Roller Shelves
- Standard finish: Beige or Black
- For alternate finishes, contact your Sales Representative

AFRSD(NH)(ND)-(OPT1)(OPT2)

AFRSD @Front Shelf Metal Divider
 NH Nominal Height 1" or 2"
 (25 mm or 51 mm)
 ND Nominal Depth
 1"H=14", 18" or 22"
 (356 mm, 457 mm, 559 mm)
 2"H=14", 18", 20", 22" or 24"
 (356 mm, 457 mm, 508 mm, 559 mm or 610 mm)
 OPT1 50PK=1"H
 25PK=2"H
 OPT2 BGE=Beige
 BLK=Black



Side View


Front View

NOTE!

20" ND ONLY in Black.



@Front replaces traditional slip-mat and spring-pusher options, giving you a more efficient, user-friendly solution for auto facing, fronting, and filling your display. The all-new pull-out version allows for even better stock rotation on hard-to-reach products.

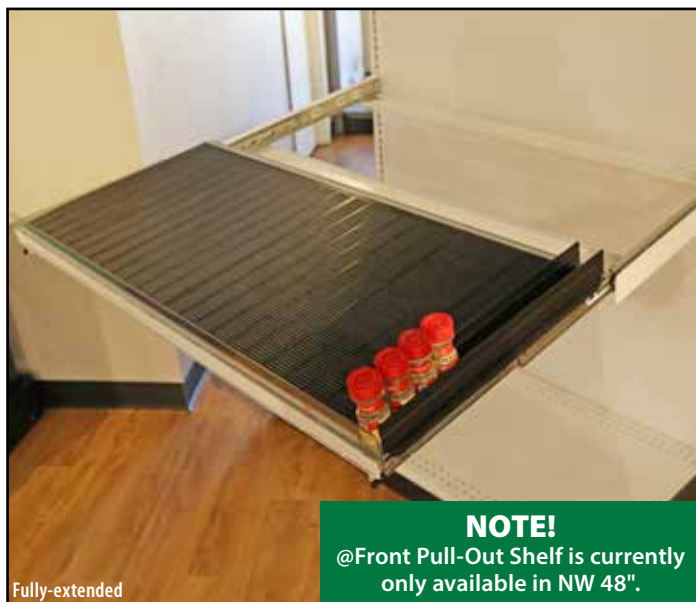


NOTE!
@Front Pull-Out Shelf is currently only available in NW 48".

@Front Pull-Out Shelf Frame

- @Front Pull-Out Shelf [AFRSPOFE(NW)(MAT)(ND)] and @Front Shelf Mat [AFRSM(NW)(ND)-(OPT)] sold separately
- Pulls out for better stock rotation
- Roller mat (sold separately) automatically fronts merchandise on shelf
- Extend only one shelf at a time, per section
- Load capacity is 80 pounds per shelf

AFRSPOFE48(MAT)(ND)

AFRS @Front Roller Shelf
POFE Pull-Out Frame
48 Nominal Width 48"
(1219 mm)
MAT Mat Size 22" or 24"
(559 mm or 610)
ND Nominal Depth 22" or 24"
(559 mm or 610)

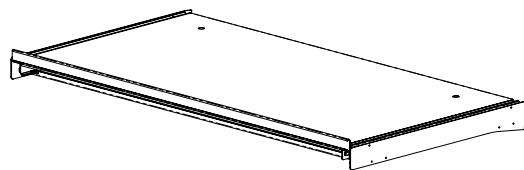

@Front Shelf Pull-Out Frame

@Front Pull-Out Shelf Mat

- @Front Pull-Out Shelf [AFRSPOFE(NW)(MAT)(ND)] and @Front Shelf Mat [AFRSM(NW)(ND)-(OPT)] sold separately
- Roller mat is available in beige or black finish, and 22" or 24" depths (559 mm or 610 mm)

AFRSM48(ND)-(OPT)

AFR @Front
SM Shelf Mat
NW Nominal Width 48"
(1219 mm)
ND Nominal Depth 22" or 24"
(559 mm or 610)
OPT BGE=Beige
BLK=Black




@Front Shelf Mat

@Front Shelf Plastic Front

- Clear, plastic front
- 2" (51 mm) installed height of 1 1/2" (38 mm)
- Fronts can be used with refrigeration,
- Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF248

AFR @Front
SPF Shelf Plastic Front
2 Nominal Height 2"
(51 mm)
48 Nominal Width 48"
(1219 mm)

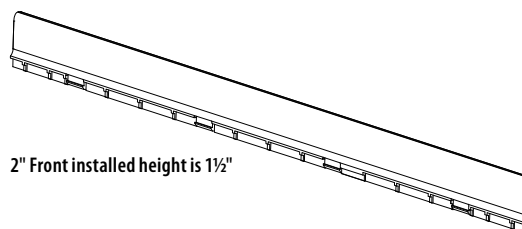


@Front Shelf Plastic Front, Heavy-Duty

- 3" or 4" (76 mm or 102 mm) heavy-duty, plastic fronts
- 3" (76 mm) installed height of 2 $\frac{7}{8}$ " (73 mm)
- 4" (102 mm) installed height of 3 $\frac{7}{8}$ " (98 mm)
- Slight bend at the top of the Plastic Front is to face the rear of the shelf
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF(NH)48H

AFR @Front
 SPF Shelf Plastic Front
 NH Nominal Height 3" or 4"
 (76 mm or 102 mm)
 NW Nominal Width 48"
 (1219 mm)
 H Heavy-Duty

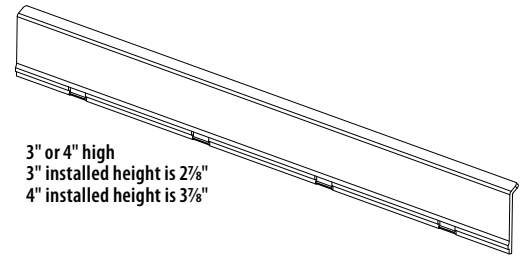


@Front Shelf Metal Divider

- Choice of 1" or 2" (25 mm or 51 mm) metal dividers
- 1" (25 mm) pack of 50
- 2" (51 mm) pack of 25
- Can be used with Maxi Line @Front Roller Shelves as well as refrigeration @Front Roller Shelves
- Standard finish: Beige or Black
- For alternate finishes, contact your Sales Representative

AFRSD(NH)(ND)-(OPT1)(OPT2)

AFRSD @Front Shelf Metal Divider
 NH Nominal Height 1" or 2"
 (25 mm or 51 mm)
 ND Nominal Depth
 22=1"H (559 mm=25 mm H)
 22 or 24=1"H or 2"H
 (559 or 610=25 mm or 51 mm)
 OPT1 50PK=1"H
 25PK=2"H
 OPT2 BGE=Beige
 BLK=Black






Create a perfectly stocked Pallet Rack shelf instantly with @Front! @Front incorporates multiple small, rolling tracks that work with gravity to automatically feed merchandise to front of shelf, cutting time and labor necessary for store merchandising and facing. Metal

dividers can be easily adjusted in mere seconds, accommodating bottled, canned, and boxed goods of varying size and shape. Rolling-track system is fully integrated with the shelf itself, little to no maintenance required. Simply remove the entire shelf for a thorough wash, or wipe the rollers with a damp cloth to remove light dust and debris. Unique, patented design uses all plastic construction, allowing roller replacement from top surface (spare rollers integrated into bottom of every shelf). 5° downtilt improves sight lines for better visual impact than other gravity feed systems. Replaces cumbersome, spring pusher systems.

Description	Part Number	Qty.
A @Front Roller Mat, Black	AFRSPR4747-BLK	2
B @Front Roller Shelf Plastic Front, 48"W x 4"H	AFRSPF(NH)48H	2
C @Front Roller Shelf Plastic Front, 48" W x 2"H	AFRSPF2(NW)	2
D* Roller Shelf Offset Front Stop	RSFSFPRWS48	2
E @Front Wire Dividers	AFRSWD547	10
F Wide Span Dart Clip	WSDC25-1	6
G Seismic Floor Anchor Expansion Bolt	SFA-EB-1	4
H Pallet Rack Frames, Regular-Duty	PR2RDF50(NH)	2
I Wide Span Gravity Feed Beam	WSGFB-(NW)-(OPT)	3
J Gravity Feed Wire Deck	HMGFWD-480648	2
K Pallet Rack Beam	PR2B(NH)(NW)-2	1

*Not shown

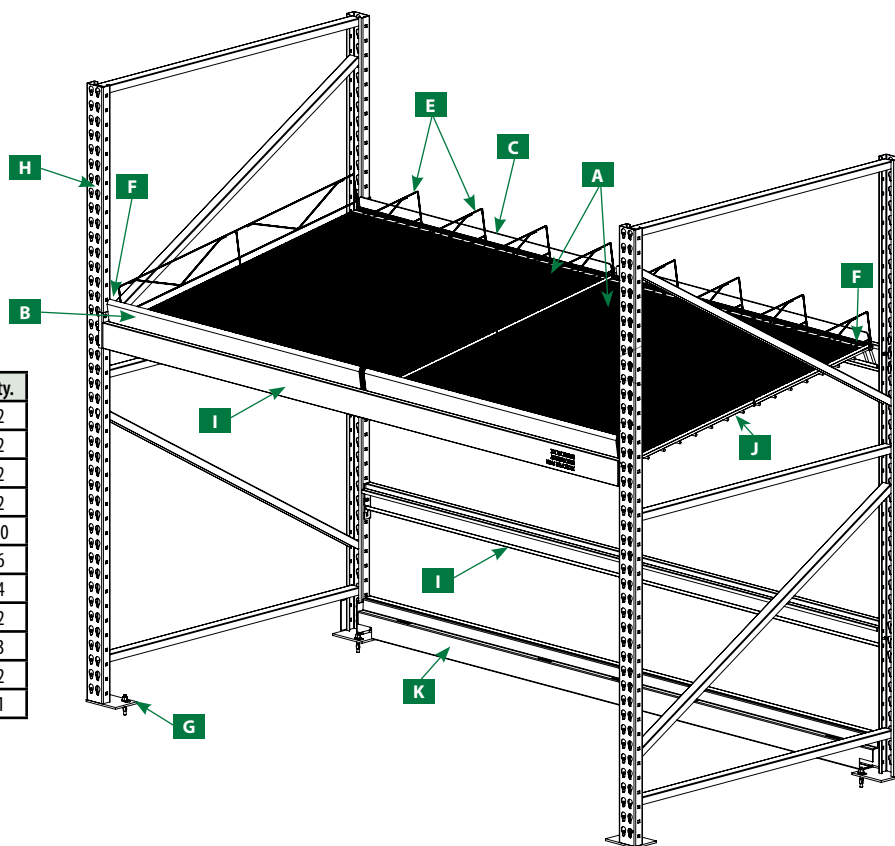

A @Front Roller Mat

- Mats are 4' wide (1219 mm) and come in two pieces that are 28 1/2" and 18 1/2" (724 mm and 470 mm)

AFRSPR4747-BLK

AFRSPR @Front Roller Mat
 47 Nominal Width 48" (1219 mm)
 47 Nominal Depth 48" (1219 mm)
 BLK BLK=Black




B @Front Shelf Plastic Front, Heavy-Duty

- 3" or 4" (76 mm or 102 mm) heavy-duty, plastic fronts
- 3" (76 mm) installed height of 2 7/8" (73 mm)
- 4" (102 mm) installed height of 3 7/8" (98 mm)
- Slight bend at the top of the Plastic Front is to face the rear of the shelf
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF(NH)48H

AFR @Front
 SPF Shelf Plastic Front
 NH Nominal Height 3" or 4"
 (76 mm or 102 mm)
 48 Nominal Width 48" (1219 mm)
 H Heavy-Duty

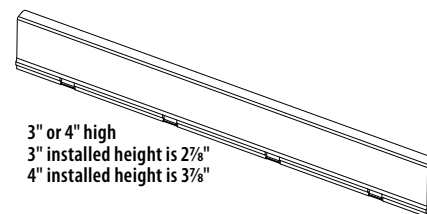


C @Front Shelf Plastic Front

- Clear, plastic front
- 2" (51 mm) installed height of 1½" (38 mm)
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF2(NW)

AFR @Front
SPF Shelf Plastic Front
2 Nominal Height 2"
(51 mm)
NW Nominal Width 36" or 48"
(914 mm or 1219 mm)

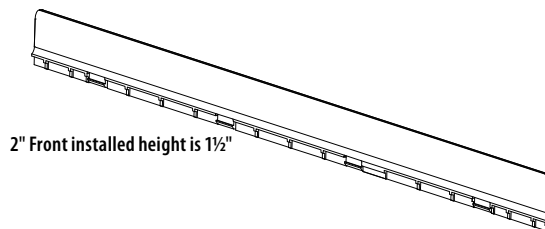


D @Front Roller Shelf Offset Front Stop for Pallet Rack

- Between inside wall of beam and @Front Roller Shelf
- Two per 8' (2438 mm) section
- Optional heavy-duty available

RSFSFPRWS48HD


RSFS Roller Shelf Front Stop
FPRWS for Pallet Rack and Wide Span
48 Nominal Width 48" (1219 mm)
HD HD=Heavy-duty



E @Front Roller Shelf Wire Divider

AFRSWD547

AFRS @Front Roller Shelf
WD Wire Divider
5 Nominal Height 5" (127 mm)
47 Nominal Width 48" (1194 mm)




@Front Roller Shelf Divider with Pusher Shelf

- For Pallet Rack application
- Ensures very light merchandise (e.g. single paper towel rolls) is fronted without manual effort
- 6 pack only

AFRSWDPUSH547-6PK

AFRS @Front Roller Shelf
WD Metal Divider
PUSH Pusher
5 Nominal Height 5" (127 mm)
47 Nominal Width 48" (1194 mm)
6PK 6 Pack

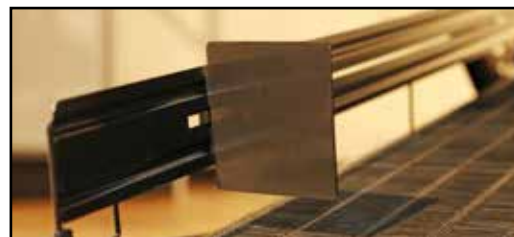


F Wide Span Dart Clip

- Spring steel clip secures beam to frame, preventing accidental disengagement
- Two required per beam

WSDC25-1

WSDC Wide Span Dart Clip
25 Thickness .250" (6 mm)
1 1=1 Pack



G Seismic Floor Anchor Expansion Bolts

- ICBO approved
- ¾"-16 x 3½"
- Order two bolts per Seismic Floor Anchor (Regular or Heavy-Duty)

SFA-EB-1

SFA Seismic Floor Anchor
EB Expansion Bolt
1 1 Pack



H Pallet Rack Frames

- Regular-duty and heavy-duty Frames used available (regular-duty Frame shown in adjacent image)
- Frames feature welded footplates
- 2" (51 mm) OC beam adjustment
- Size availability to 48" (1219 mm) wide and 192" (4877 mm) high
- Allow minimum pallet overhang of 2" (51 mm) front and 2" (51 mm) rear when selecting frame size
- Standard finishes: Sahara or Blue Gray

PR2(TYPE)F(ND)(NH)


PR2 Pallet Rack 2" (51 mm) OC
 TYPE HD=Heavy-Duty, RD=Regular-Duty
 F Frame
 ND Nominal Frame Depth 24" to 48" in 6" increments
 (610 mm to 1219 mm in 152 mm increments)
 NH Nominal Frame Height 72", 84", 96", 108", 120",
 132", 144", 168" or 192"
 (1829 mm, 2134 mm, 2438 mm, 2743 mm, 3048 mm,
 3353 mm, 3658 mm, 4267 mm or 4878 mm)

**I Wide Span Gravity Feed Beam**

- Regular-duty and heavy-duty Beams available (regular-duty beam shown in adjacent image)

WSGFB-(NW)-(OPT)

WS Wide Span
 GFB Gravity Feed Beam
 NW Nominal Width 36", 42", 48", 60", 72", 84" or 96"
 (914 mm, 1057 mm, 1219 mm, 1524 mm,
 1829 mm, 2134 mm or 2438 mm)
 OPT LD=Light-Duty
 RD=Regular-Duty
 HD=Heavy-Duty

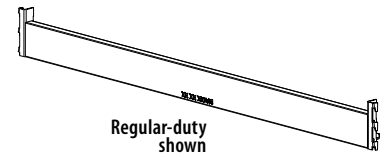


Regular-duty shown

J Gravity Feed Wire Deck

- Wire-grid angled deck

HMGFWD-480648


HM Hypermaxi
 GFWD Gravity Feed Wire Deck
 48 Nominal Depth 48" (1219 mm)
 06 Beam Drop 6" (152 mm)
 48 Nominal Width 48" (1219 mm)

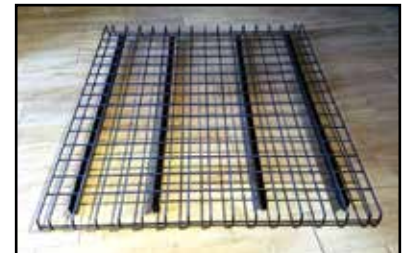**K Pallet Rack Beam**

- Available in three heights for differing load capacities
- Step depth accommodates 2" (51 mm) dimensional lumber decking, or wire decking
- Beams are slotted in step to accept deck supports under decking
- Standard finishes: Sahara or Blue Gray

PR2B(NH)(NW)-2

PR2 Pallet Rack 2" (51 mm) OC
 B Beams
 NH Nominal Beam Height
 35=3½" (89 mm)
 50=5" (127 mm)
 60=6" (152 mm)
 NW Nominal Width 36", 48", 60", 72", 84", 96", 108", 120",
 132" or 144"
 (914 mm, 1219 mm, 1524 mm, 1829 mm, 2134 mm,
 2438 mm, 2743 mm, 3048 mm, 3353 mm or 3658 mm)
 2 Step 2 Only

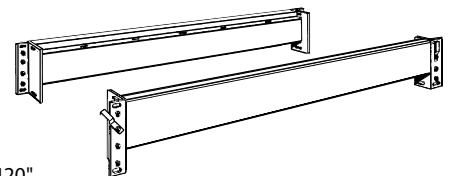



The @Front G5 converts most standard Madix shelves into a self-fronting, gravity-feed system, cutting manual labor costs and time while making merchandise more accessible to customers.

@Front helps retailers maintain the appearance of a neat, fully stocked display almost effortlessly. Durable roller segments replace traditional spring-pusher systems to reduce shrink, minimize the number of mis-stocked items, and provide more flexibility for merchandising changes.

Order components for a complete system:

- @Front Pitch Converter - required to create a 6° to 7° downtilt (standard 15° downtilt is too steep for roller systems) or Downtilt Shelf 7° [DTS7-(NW)(ND)] can be used without pitch converter
- @Front G5 Rail Set
 - Features slots to attach a plastic front/guard to the lip of the shelf
 - Both ends of the Rail Set have provisions to snap-fit the roller track
 - Includes pine-tree fasteners for attachment to standard shelf perforations
- @Front G5 Roller Track - includes a single strip of rollers for smaller merchandise (use two or more tracks for larger/heavier merchandise)
- @Front G5 Divider
 - Snaps into the roller track to separate and retain merchandise columns
 - Adjusts left or right using integrated ratchet
 - Must be ordered in the same depth as the @Front G5 Roller Track
- @Front Plastic Front Retainer - clear plastic front available in 2", 3" or 4" (51 mm, 76 mm, or 102 mm)

@Front Shelf Pitch Converter

- Downtilt of 6° to 7°
- Compatible with all Standard Upper Shelf [SUS-(NW)(ND)], Straight-in Insertion [STP(NW)(ND)], 18" (457 mm) or smaller
- Use of the Pitch Converter [AFPC-(COLOR)] will increase the shelf depth by 21/2 (64 mm)
Example: When a 14" (356 mm) deep shelf is used with a Pitch Converter [AFPC-(COLOR)], the overall depth will be 16½" (419 mm)
- Available only in beige or black

AFPC-(COLOR)

AFPC @Front Pitch Converter
 COLOR BGE=Beige
 BLK=Black

NOTE!

@Front Pitch Converter is not compatible with STP shelves deeper than 18" (457 mm).




Downtilt Shelf 7°

- 7° single-position downtilt shelf
- Includes standard Standard Upper Shelf [SUS-(NW)(ND)] type perforations
- Most Standard Upper Shelf [SUS-(NW)(ND)] options (tag molding, etc.) are available with DTS7-(NW)(ND)

DTS7-(NW)(ND)

DTS7 Downtilt Shelf 7°
 NW Nominal Width 36" or 48"
 (914 mm or 1219 mm)
 ND Nominal Depth 14", 16", 18" or 22"
 (356 mm, 406 mm, 457 mm or 559 mm)

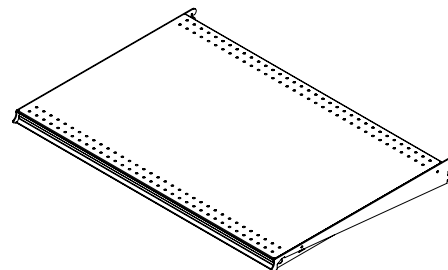

@Front Gen5 Rail Set (Front and Rear)

- Set includes one front rail and one rear rail

AFG5RS48

AFR5RS @Front Gen5 Rail Set
 48 Nominal Width 48" (1219 mm)



@Front Gen5 Roller Track

- Available only in Beige or Black

AFG5RT(ND)-(COLOR)

AFG5RT @Front Gen5 Roller Track

ND Nominal Depth 14", 16", 18" or 22"
(356 mm, 406 mm, 457 mm or 559 mm)

COLOR BGE=Beige
BLK=Black

**@Front Gen5 Divider**

- Available only in Beige or Black

AFG5D3(ND)-(COLOR)

AFG5D @Front Gen5 Divider

3 Nominal Height 3" (76 mm)

ND Nominal Depth 14", 16", 18" or 22"
(356 mm, 406 mm, 457 mm or 559 mm)

COLOR BGE=Beige
BLK=Black

**@Front Shelf Plastic Front**

- Clear, plastic front
- 2" (51 mm) installed height of 1½" (38 mm)
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems


AFRSPF2(NW)

AFR @Front

SPF Shelf Plastic Front

2 Nominal Height 2"
(51 mm)

NW Nominal Width 36" or 48"
(914 mm or 1219 mm)

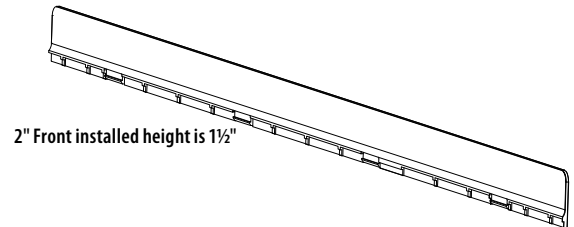**@Front Shelf Plastic Front, Heavy-Duty**

- 3" or 4" (76 mm or 102 mm) heavy-duty, plastic fronts
- 3" (76 mm) installed height of 2⅞" (73 mm)
- 4" (102 mm) installed height of 3⅞" (98 mm)
- Slight bend at the top of the Plastic Front is to face the rear of the shelf
- Fronts can be used with refrigeration, Heavy-Duty, Maxi Line, and Gen5 Roller Systems

AFRSPF(NH)(NW)H


AFR @Front

SPF Shelf Plastic Front

NH Nominal Height 3" or 4"
(76 mm or 102 mm)

NW Nominal Width 36" or 48"
(914 mm or 1219 mm)

H Heavy-Duty

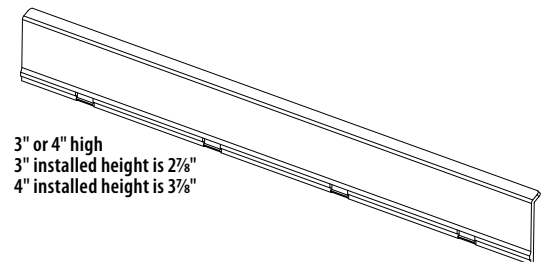**@Front Gen5 Driver**


- Available only in Beige or Black


AFG5DR-(COLOR)

AFG5DR.... @Front Gen5 Driver

COLOR BGE=Beige
BLK=Black



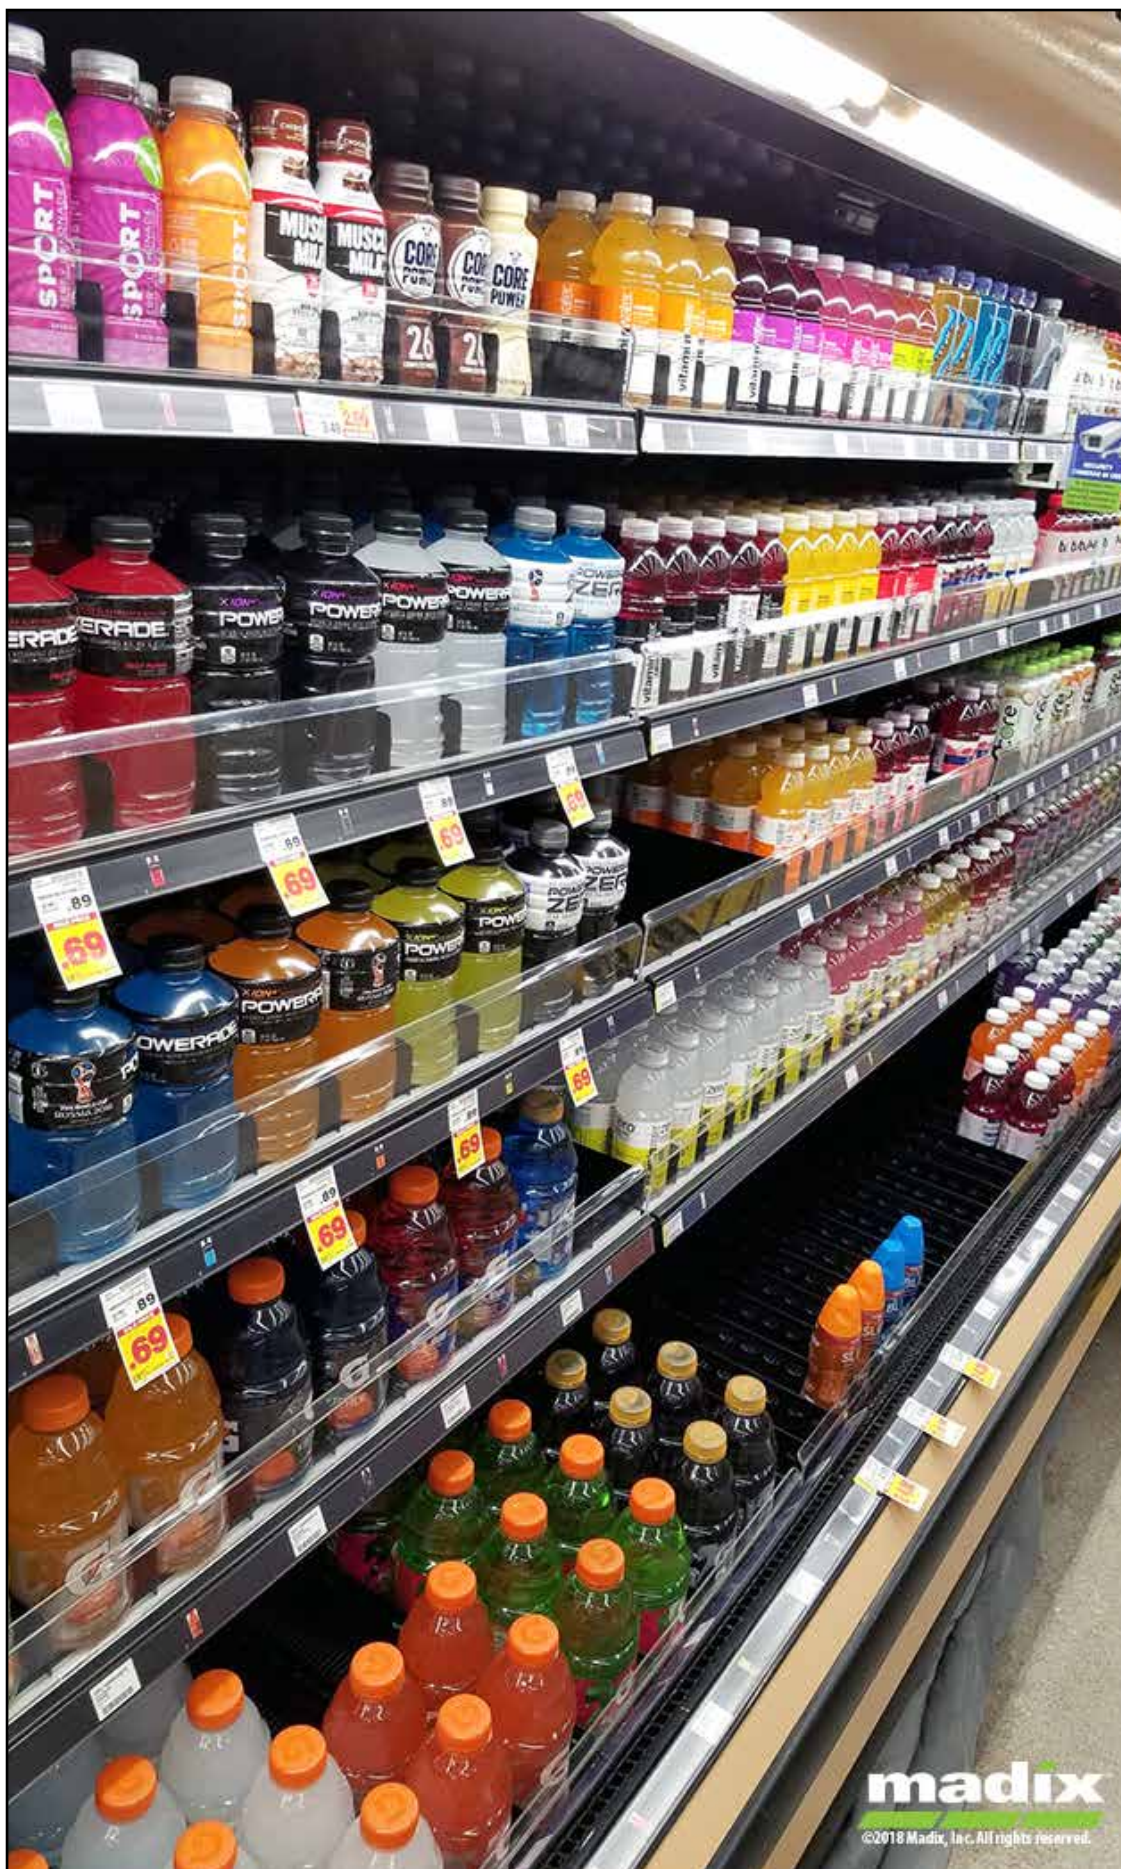

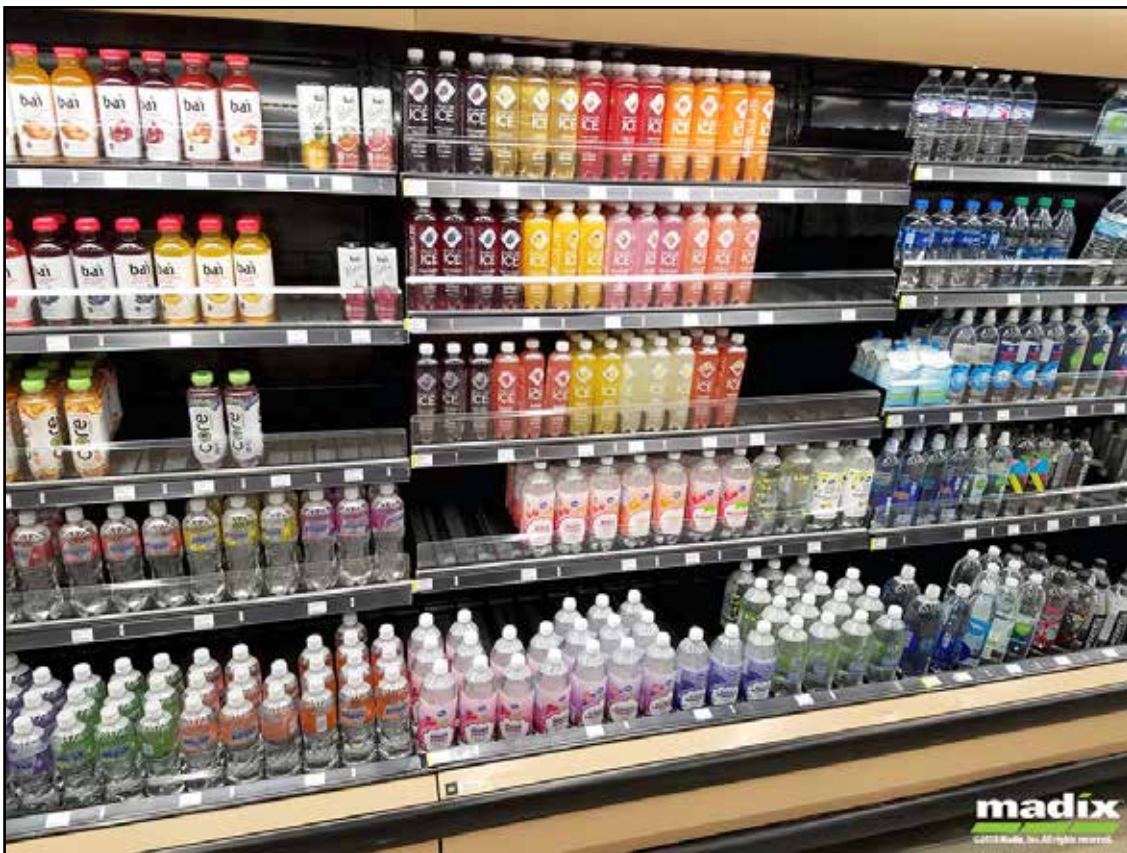





Prices All prices are subject to change without notice. Every effort will be made to give advance notice of any increase through notification from the home office. The customer will receive an acknowledgement showing prevailing prices at the time the order is processed. State or other sales or use taxes, freight and surcharges will be charged when applicable. Freight quotes may be provided based upon information available at time of quote, but are not guaranteed. Active freight charges will be billed if applicable. When market conditions dictate, a surcharge may be implemented. All quotations automatically expire at the end of 30 days.

Terms Cash in advance prior to production or net 30 days if open account status is approved by Madix Credit Department. MasterCard, Visa, and American Express are accepted.

Acceptance All orders, contracts, and agreements are subject to Madix's acceptance and approval. Madix shall not be liable for any delay in the performance of any order, contract, in the delivery of any goods, or for any damages resulting from such delay, when such delay is directly or indirectly caused by or due to fire, flood, accident, riot, act of God, war, governmental decree or order, strike, labor difficulties, shortage of labor, fuel, power, material or supplies, transportation delay or any other delay or causes (whether or not similar to any of those herein before specified) beyond our reasonable control. Order acceptance will be per the conditions and terms outlined in Madix's acknowledgement. Mailing of the acknowledgement will signify Madix's acceptance of the order.

Minimum Charge Orders are subject to a minimum charge of \$50.00 net (merchandise only) per shipping destination.

Changes and Cancellations Customer requested changes and cancellations are subject to approval by Madix. Every reasonable effort will be made to accommodate these requests without additional cost to the customer. Any manufacturing or engineering costs incurred will be charged to the customer. Orders produced and delayed for more than one week may incur charges for demurrage, unloading, or other storage costs. Madix will advise customers of the estimated charges at the time changes or cancellations are made.

Shipments Method and route of shipment are at Madix's discretion unless Madix is furnished with complete shipping instructions at least ten (10) days before the scheduled shipping date. Freight is FOB/EXW Madix shipping point.

Freight Claims For common carrier shipments, claims must be made directly with the carrier by the recipient. Listed are the types of losses which may occur, and your responsibility in handling them:

Loss of Freight: It is the receiver's responsibility to count the freight at the time of delivery. Any exception must be noted on the carrier's delivery receipt at time of delivery.

Damage of Freight: As with a loss of freight, damage of freight must be noted on the carrier's delivery receipt at the time of delivery. It is the receiver's responsibility to make sure that the freight is inspected for visible damage and that the number of pieces damaged is marked on the carrier's delivery receipt. Failure to note visible damage at the time of delivery will result in non-payment of a damage freight claim. Salvage must be held for the carrier.

Concealed Damage: If goods are received in apparently good condition but there is concealed damage, it is the customer's responsibility to contact your Madix Service Representative within 15 calendar days from delivery. Customer must keep the product and the packaging so that an inspection may be conducted by the carrier. Failure to handle a concealed damage claim in this manner could greatly reduce the amount recovered from the carrier.

Returned Goods Returned Goods requests must be submitted to Madix, Inc. within 60 days after receipt of product. Authorization must be in writing on Madix's RGA (Return Goods Authorization) form. Goods must be received within 30 days of RGA issue date for credit. Customer is responsible for delivery of authorized returns to Madix designated location in condition originally received. Only Code A products finished in returnable colors as indicated on the finish policy pages will be considered for return, and only items in unused, in resalable condition, and in the original packaging. No special size, color, or specially manufactured parts or products are eligible for return unless sent to the customer as the result of an error by Madix. Only merchandise listed on the RGA will be accepted for conditional return. Credit will not be issued for that portion of merchandise that is not considered resalable. A handling and restocking charge of 25% of the invoice price will be charged for all approved returns. Submit requests to your Madix Sales Representative or Customer Service Department prior to returning any merchandise. All returns must be have the customer name and Madix RGA number prominently displayed on each package. Product to be shipped prepaid at customer's expense unless prior approval has been received from an authorized Madix Sales Representative.

Warranty We warrant to the original purchaser that all products manufactured by Madix are free from defects in material and workmanship. This warranty is invalid if products or parts are modified or used in a manner other than the intended purpose. Our obligation under this warranty is limited to repairing or replacing of any part or parts which shall, within one (1) year after delivery to the original purchaser, be demonstrated to be defective under normal use and service. This warranty is in lieu of all other warranties, expressed or implied, and of all other obligations or liabilities of any kind on Madix's part, and no modification of this warranty shall be valid or binding unless in writing and signed by an officer of Madix, Inc.

Production Madix fixtures are manufactured utilizing the most current technology of highly automated systems with process control techniques. Skilled craftsmanship, combined with automatic presses, roll forming machines, multi-spot welders, conveyers, finishing equipment and thorough inspections produce store fixtures of the highest quality.

Upright Carefully engineered of heavy gauge, high quality steel components, the UPRIGHT is slotted one inch on center for maximum flexibility, shelf adjustability and use of available space. Standard heights range from 36" through 96" with built-in leveler. For the finishing touch at the end of the shelving run, the snap-on UPRIGHT END COVER is made of durable, scuff and impact resistant plastic or heavy gauge metal. The UPRIGHT CAP, made of high impact plastic, has provision for a sign holder.

Base Shoe The five inch low BASE SHOE features exclusive "I" beam design, engineered of projection welded high strength steel parts insuring maximum load capacity. Snaps securely into upright with leveler and electrical access allowing for quick error free installation. For the finished look, the one piece slip on BASE END COVER is made with a high impact plastic nose reinforcement to protect base shelf tag molding.

Spanners Snap-in support SPANNERS keep uprights at equal spacing and hold the back panels rigid. Each spanner has knockouts for electrical access and telescoping uprights.

Back Panels High density hardboard BACKS fit flush to the face of the upright. A wide variety of finishes include solid, pegboard and wood grain in a wide assortment of optional colors. Mirrors and open backs are also available.

Kickplate Fully floating feature of kickplate allows flush fit against uneven floors, snaps in and out without disturbing base shelf for easy cleaning. Convenient knockout accommodates electrical access.

Base and Upper Shelves Steel base shelves feature lock tabs to insure quick installation and precision alignment. A double row of 1/4" inch perforations on the front and rear edge makes any form for binning possible. Slim bracket, high tensile design with flat or 15 degree downslope upper shelf positions allow for maximum merchandise visibility. Integrally formed price tag molding accommodates 1 1/4" tag. Upper shelves available in 8", 10", 12", 14", 16", 20", 22", 24", 26", 28", and 30" depths. Base shelves available in 12", 14", 16", 18", 20", 22" 24", 26", 28" and 30" depths.

Shelf Loading The recommended load capacity for upper shelves is based on evenly distributed weight. Capacities are reduced by 35% when front half is loaded and reflect rated maximum load. Load capacities are shown in the General Information Section under Shelf Loading.

Baked Enamel, Powder Coat Finishes All metal parts are finished with a specially formulated high solids or powder which are electrostatically bonded in a unique multi-stage process, to insure the highest quality finish. Aerosol cans of Touch-up paint are available in Madix's standard and optional colors. FAA regulations prohibit the shipment of this product by air or in export containers by air or ocean to countries outside the United States.

Product Maintenance When necessary to clean Madix shelving, use a non-abrasive mild detergent and warm water, followed by thorough drying. The use of a cloth made of a soft white cotton material is strongly recommended. The use of cleaning products that contain abrasive, bleach, or strong solvents, such as ketones, ethers, etc. will result in damage to the finish. The damage is most severe when these harsh cleaning agents are used on colors which contain leafing aluminum pigment such as powder chrome, silver vein, and other "vein" type finishes. The aluminum in these coatings resides at the surface of the finish and is therefore susceptible to damage by the harsh cleaning agents. As an alternative to the mild detergent, cleaners with ingredients similar to those found in products such as 409, Fantastik, and Simple Green can be used. Caution! Cleaners having ingredients similar to those found in Ajax, Borax, Comet, etc. should be avoided as finish damage could result.

Codes In your planning stage, consult with local municipal engineers to determine what codes and restrictions will be applicable in the locations where the shelving will be used. Codes may include: state, local, fire, building, and health and safety codes. Seismic requirements may apply in some locations. For example, in most locations fire codes state that fixtures need to be at least 18 inches below the sprinklers.

Shelving Selection Take into consideration the load that is expected not only on each shelf but also on the unit as a whole. Take into account the upright capacity. Refer to the load capacity information that is in the Madix Standard Catalog. Madix shelves are rated using an evenly distributed load. Do not install shelves or accessories that extend beyond the depth of the Base Shelves. Consider making the Base Shelves and low height fixtures a contrasting color from the floor's color to prevent potential tripping hazards. Do not use Madix parts or accessories for any purpose other than originally intended by Madix.

Shelving Installation Initial installation or relocation of Madix shelving should be supervised by qualified personnel. Madix products should be installed according to Madix's specifications. Madix's installation sequence must be followed for assembly and leveling. An improperly installed store fixture has a poor appearance and may cause a dangerous condition. Be especially careful when leveling fixtures with offset loads in which one side of the fixture has a considerably heavier load than the other side. Dismantling and reassembling used Madix shelving can be dangerous if the installers who are doing the work leave out parts, use damaged parts, or do not reassemble the product by Madix's specifications. Do not alter, modify, or structurally change any shelving component. Do not move assembled shelving. Only parts and accessories that are produced and supplied by Madix are covered by the Madix warranty. Do not assemble Madix fixtures with parts from other manufacturers. Under no circumstances should you use damaged parts. When assembling Gondola/Wall Shelving, install Kickplates to protect the Base Shoes from floor cleaning equipment and to offset the possible bumping and misalignment of the shelving runs. Do not install shelves or accessories on the sides of wall sections or any section that is not supported by Base Shoes. Use caution when handling and transporting shelving parts. Be careful when cutting shrink wrap from pallets because the shelving parts can dislodge from the wrap and fall. Cut the wrap gradually from the top, only as much as you need to remove the product from the top. Two common hazards while installing store fixtures are: employees hurting themselves with improper types of box cutters and employees putting boxes on the floor and then tripping over them.

Anchoring and Floors Depending on code requirements and Madix's specifications, some products must be anchored to the walls and/or floors. Do not lean tall or heavy objects against unanchored shelving systems. Retailers must consider the type of floor upon which the shelving will be installed.

Impact Loading Impact during the loading and unloading of merchandise can create an adverse loading situation and may result in damage to or failure of the Madix shelving. Do not walk or climb on Madix shelving.

Overturning Overloading the top portion of the shelving, non-uniform loading, out-of-plumb installation, and impact can cause shelving to overturn. Improperly installed Madix shelving with offset loads can cause store fixtures to collapse. Carefully follow Madix's installation instructions in order to prevent shelving from overturning.

Additional Shelving Safety Pointers Product loading instructions are included with each Madix order. Retailers must make merchandisers aware of the product's load limitations and the dangers of overloading the shelving. Remove any merchandise or overstock before attempting to move Madix shelving. Periodically inspect your Madix shelving for damaged or loose parts. Make sure that shelves and accessories are properly seated in the slotting or perforations. Make sure that shelves and accessories are not overloaded. As merchandising changes, beware of creating offset loads on shelving runs that are not properly leveled. Look for leveling warning signs such as increased gaps between shelves or accessories that may indicate that the shelving runs need re-leveling. Damage to Madix shelving is dangerous. In some cases, the shelving should be unloaded immediately and repaired or replaced before returning to service. Re-level fixtures that you have bumped or moved. Incorporate safety into your merchandising strategy. When possible, merchandise the heavier products on the lower shelves. If the merchandise will not fit on the Madix shelves and there is a replenishment cycle, make sure that the cycle is a safe one. Make sure that merchandise and overstock are properly stacked and maintained so that items will not fall into the aisles. Assure that customers who handle merchandise or overstock will not push product from one side of the Madix fixture to the other side where people could be injured from falling merchandise. Safely secure overstock that is placed on Madix shelves overhead. Measure the difficulty that your employees have in retrieving overstock, and consider whether employees or customers could be injured if the product happens to fall from the shelving units. Teach employees and inform customers that Madix shelves should never be used as ladders to reach higher shelves. Ladders should be clearly marked for employees use only and should not be left unattended, or customers will try to remove stock on higher shelves by themselves. Notify customers to ask for assistance when they need product that is out of their reach.

POSSESSION OF THIS CATALOG IS NOT AUTHORIZATION TO SELL MADIX PRODUCTS!

ALL FACTORY QUOTES ARE GOOD FOR 30 DAYS ONLY.

Finish Policy for Metal Products

Standard Colors, Returnable– Code A Madix standard returnable colors for display shelving are Sahara, Blue Gray, Oyster, Snow White, and Satin Black. Madix standard returnable colors for wire products only are Powder Chrome and Silver Vein. All catalog items are priced in standard color.

No Charge Colors (Non-Returnable)– Code B Madix non-returnable colors offered at the standard price are Chocolate, Dove Gray, Dover White, Fashion Gray, Skyline Gray and Tru Gray. All catalog items are priced in standard color.

Optional Colors-Level I Finishes (Non-Returnable)– Code B Madix offers optional colors, also known as Grade I Finishes, at additional charge: Bright Orange, Hollyberry, Hunter Green, Mandarin, Neon Blue, Spectrum Blue, Spectrum Green, Spectrum Red and Valencia. Products painted with these colors are non-returnable.

Metal Components: \$350.00 line charge plus published per-piece charge. **Metal Back panels:** \$350.00 line charge plus published per-piece charge.

Special Colors– Code C Use line change charge plus per piece charge supplied by customer service. Special colors are non-returnable.

Pricing For Levels II To IV:

Level II: 1.6 x Optional Color Upcharge. **Example:** Optional upcharge for SUS is \$1.50; upcharge with Level II finish will be \$2.40.

Level III: 2.8 x Optional Color Upcharge. **Example:** Optional upcharge for SUS is \$1.50; upcharge with Level III finish will be \$4.20.

Level IV: 3.8 x Optional Color Upcharge. **Example:** Optional upcharge for SUS is \$1.50; upcharge with Level IV finish will be \$5.70.

Metal Components: \$500.00 line charge plus published per-piece charge. **Back panels:** \$350.00 line charge plus published per-piece charge.

Maintenance for Metal Products

Baked Enamel and Powder Coated Finishes All metal parts are finished with a specially formulated high solids or powder which are electrostatically bonded in a unique multi-stage process to insure the highest quality finish. Aerosol cans of touch-up paint are available in Madix's standard and optional colors. FAA regulations prohibit the shipment of this product by air or in export containers by air or ocean to countries outside the United States.

Product Maintenance When cleaning Madix shelving, use a non-abrasive mild detergent and warm water, followed by thorough drying. Using a soft white cotton cloth is strongly recommended. Cleaning products containing abrasives, bleach, or strong solvents will result in damage to the finish, especially when used on colors containing leafing aluminum pigment, such as powder chrome or vein-type finishes.

Finish Policy for Wood Products

High Pressure Laminate The terms "laminate" or "HPL" are commonly applied to this material which consists of multiple layers of paper infused with phenolic resin and topped by a finish paper coated with clear melamine resin, all totally bonded under high pressure and heat. The finished sheet has extremely high wear and impact resistance.

Customer Specified High Pressure Laminate Madix coding is based on Wilsonart availability. Laminates other than Wilsonart may require additional lead time.

- Customer specified laminates add \$100.00 per pattern, per order
- Additional charge will apply based on the laminate grade that is chosen

Laminates that are not from a laminate manufacturer's standard samples (metallics, heavy textures, wet looks, core edge, special prints) will require a special quote. Contact Customer Service for specific pricing on laminates not listed above.

Thermofused Panels Thermofused panels are ideal for non-wear surfaces and have substantial impact and wear characteristics compared to melamine panels previously available. The product is produced using hot press laminating polyester or melamine resin impregnated self-bonding paper to wood substrate. Performance specifications are available from the American Laminations Association. Madix does not recommend the use of Thermofused panels on horizontal or other wear surfaces.

Printed Mirror Hardboard Printed materials are primarily used for back panels, but appear as various other products. These materials are carefully cross matched to the corresponding laminates and Thermofused. Mylar mirror hardboard is used in the same applications and is also available in pegboard and grooved pegboard. **Finish Policy for Back Panels**

Standard Colors, Returnable– Code A Madix standard returnable colors for display shelving back panels are Sahara, Oyster, and Snow White.

Optional Colors-Level I Finishes (Non-Returnable)– Code B Madix non-returnable back panel colors offered at the optional price are Chocolate, Dove Gray, Dover White, Fashion Gray, Satin Black, Skyline Gray, Blue Gray and Tru Gray. Set-up charge of \$350.00 applies.

Optional Colors-Level II Finishes (Non-Brilliant)– Code B Madix offers optional back panel colors also known as non-brilliant finishes at an additional charge. These colors include custom grays, off whites, tans, and beiges not listed in Madix's Finishes brochure. Products painted with these colors are non-returnable. Set-up charge of \$350.00 applies.

Optional Colors-Level III Finishes (Brilliant)– Code C Brilliant back panel finishes include Hunter Green, Neon Blue, Spectrum Blue, and Spectrum Green. Set-up charge of \$350.00 applies.

Optional Colors-Level IV Finishes (Reds and Yellows)– Code C Use line change charge plus per piece charge supplied by customer service. Special colors are non-returnable. Set-up charge of \$350.00 applies.

Pricing For Levels II To IV

Level II 1.2 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. **Example:** Optional upcharge for a BH-342 with a Level II finish would be calculated as follows: $\$13.85 - \$12.45 = \$1.40 \times 1.2 = \1.68 . The color upcharge for a BH-342 with a Level II finish is \$1.68. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level II finish is \$15.53 ($\$13.85 + \$1.68 = \15.53).

Level III 1.4 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. **Example:** Optional upcharge for a BH-342 with a Level III finish would be calculated as follows: $\$13.85 - \$12.45 = \$1.40 \times 1.4 = \1.96 . The new color upcharge for a BH-342 with a Level III finish is \$1.96. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level III finish is \$15.81 ($\$13.85 + \$1.96 = \15.81).

Level IV 1.8 x the difference between the Hardboard/Pegboard Optional Color pricing and the Hardboard/Pegboard Sahara pricing. **Example:** Optional upcharge for a BH-342 with a Level IV finish would be calculated as follows: $\$13.85 - \$12.45 = \$1.40 \times 1.8 = \2.52 . The color upcharge for a BH-342 with a Level IV finish is \$2.52. This upcharge amount will be added to the Optional Color price of a BH-342. The new price of a BH-342 using a Level IV finish is \$16.37 ($\$13.85 + \$2.52 = \16.37).

NOTE! See Finishes Brochure for color samples.

Part Name

Part Number

Page Number

A		
@Front Deck	AFRD(NW)(ND)-2PK	8
@Front Gen5 Divider	AFG5D(NH)(ND)-(COLOR)	15
@Front Gen5 Driver	AFG5DR-(COLOR)	15
@Front Gen5 Rail Set (Front and Rear)	AFG5RS48	14
@Front Gen5 Roller Track	AFG5RT(ND)-(COLOR)	15
@Front Pull-Out Shelf Frame	AFRSPF(NW)(MAT)(ND)	9
@Front Pull-Out Shelf Mat	AFRSM48(ND)-(OPT)	9
@Front Roller Mat	AFRSPR4747-BLK	11
@Front Roller Shelf Divider with Pusher Shelf	AFRSWDPUSH547-6PK	12
@Front Roller Shelf Offset Front Stop for Pallet Rack	RSFSFPRWS(NW)(OPT)	12
@Front Roller Shelf Wire Divider	AFRSWD547	12
@Front Shelf Frame	AFRSF(NW)(ND)	7
@Front Shelf Kit for Hill Phoenix Coolers	AFRSHPK(NW)(ND)-BLK	5
@Front Shelf Kit for Hussmann Coolers	AFRSHUCK(NW)(ND)-BLK	5
@Front Shelf Mat	AFRSM(NW)(ND)-(OPT)	9
@Front Shelf Metal Divider	AFRSD(NH)(ND)-(OPT1)(OPT2)	8, 10
@Front Shelf Pitch Converter	AFPC-(COLOR)	14
@Front Shelf Plastic Front	AFRSPF2(NW)	8, 9, 12, 15
@Front Shelf Plastic Front, Heavy-Duty	AFRSPF(NH)(NW)H	8, 15
@Front Shelf Plastic Front, Heavy-Duty	AFRSPF(NH)48H	10, 11
@Front Shelf, Well Kit	AFRSDHUCK(NW)(ND)-BLK	6
D		
Downtilt Shelf 7"	DTS7-(NW)(ND)	14
G		
Gravity Feed Wire Deck	HMGFW-480648	13
P		
Pallet Rack Beam	PR2B(NH)(NW)-2	13
Pallet Rack Frame	PR2(TYPE)F(ND)(NH)	13
S		
Seismic Floor Anchor Expansion Bolts	SFA-EB-1	12
W		
Wide Span Dart Clip	WSDC25-1	12
Wide Span Gravity Feed Beam	WSGFB-(NW)-(OPT)	13





MADIXTM
STRONG AS STEEL
WWW.MADIXINC.COM



Texas 500 Airport Road, Terrell, TX 75160 | 1010 S. Bolton, Jacksonville, TX 75766
Alabama 20984 Alabama Hwy. 9, Goodwater, AL 35072 | 500 Madix Drive, Eclectic, AL 36024
©2026 Madix, Inc. All rights reserved. Not responsible for errors and omissions in printing. Rev. 3/26

